

CUTOUT PORCELAIN INSULATOR

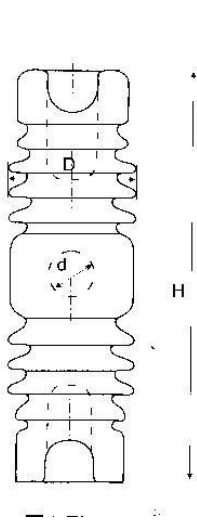


Fig. 1

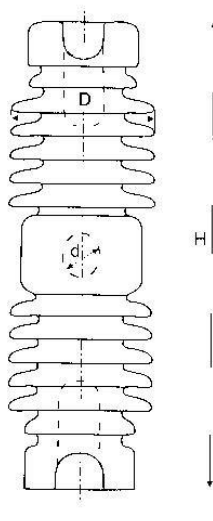


Fig. 2

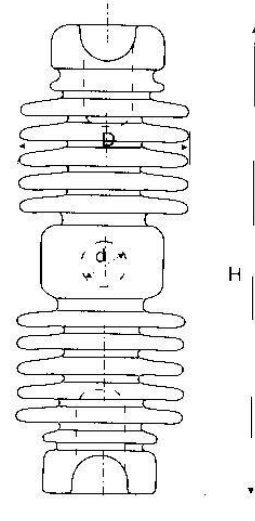


Fig. 3

STANDARD PARTICULARS

| Cat NO. | Voltage class kv | Fig. No. | Creepage Distance mm | Cantilever Strength kN | Main Dimensions (mm) | | | Shed Number | Weight Kg |
|---------|------------------|----------|----------------------|------------------------|----------------------|-----|----|-------------|-----------|
| | | | | | H | D | d | | |
| 111501 | 15 | 1 | 220 | 18 | 287 | 87 | 32 | 8 | 2.6 |
| 111502 | 15 | 1 | 240 | 18 | 287 | 90 | 32 | 8 | 2.8 |
| 111503 | 15 | 1 | 255 | 20 | 287 | 105 | 32 | 8 | 3.2 |
| 112501 | 25 | 2 | 300 | 10/12.5 | 376 | 90 | 32 | 12 | 3.5 |
| 112502 | 25 | 2 | 340 | 10 | 375 | 96 | 35 | 12 | 3.7 |
| 112503 | 25 | 2 | 280 | 10 | 376 | 87 | 32 | 12 | 3.4 |
| 112504 | 25 | 2 | 360 | 10 | 376 | 102 | 35 | 12 | 3.9 |
| 112427 | 24/27 | 3 | 470 | 10 | 376 | 131 | 35 | 12 | 5.8 |

Applicable Standard: IEC ANSI AS

CUTOUT PORCELAIN INSULATOR

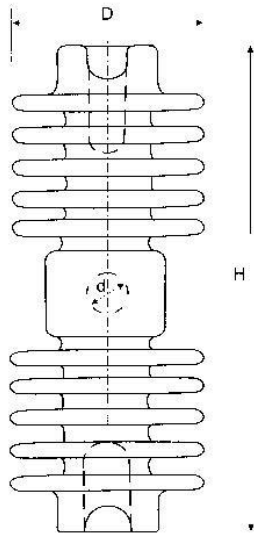


Fig. 4

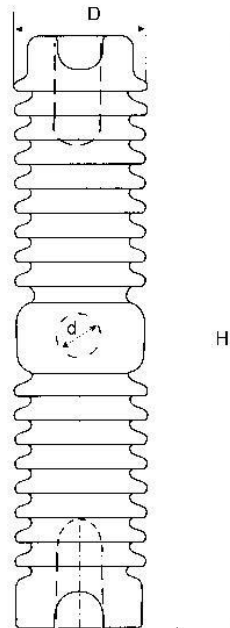


Fig. 5

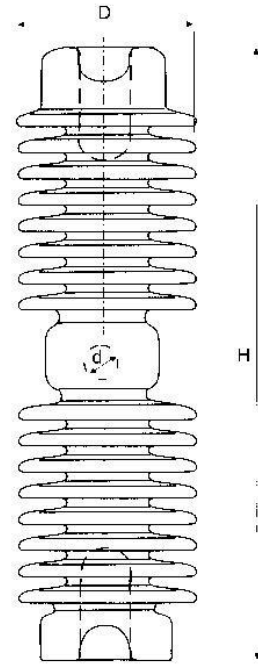


Fig. 6

STANDARD PARTICULARS

| Cat NO. | Voltage class kv | Fig. No. | Creepage Distance mm | Cantilever Strength kN | Main Dimensions (mm) | | | Shed Number | Weight Kg |
|----------|------------------|----------|----------------------|------------------------|----------------------|-----|----|-------------|-----------|
| | | | | | H | D | d | | |
| 11242701 | 24/27 | 4 | 460 | 10 | 375 | 129 | 32 | 10 | 6.0 |
| 11252701 | 25/27 | 5 | 432 | 6.8/10 | 467 | 95 | 32 | 17 | 5.2 |
| 11242702 | 24/27 | 4 | 450 | 10 | 376 | 127 | 32 | 10 | 5.8 |
| 11242703 | 24/27 | 4 | 500 | 10 | 365 | 150 | 35 | 10 | 6.5 |
| 11252702 | 25/27 | 4 | 550 | 10 | 375 | 155 | 35 | 10 | 6.9 |
| 11333601 | 33/36 | 6 | 660 | 6.8/10 | 467 | 130 | 35 | 16 | 7.5 |
| 11333602 | 33/36 | 6 | 660 | 6.8/10 | 467 | 121 | 32 | 16 | 7.5 |

Applicable Standard: IEC ANSI AS